



# Capri Acrylic Outward Swinging Door Walk-In Tub Specifications

**Actual Size:** 30 x 52 x 42 • (76.2cm x 132.08 cm x 106.68 cm)

**Seat Width:** 20" • (50.8 cm)

**Shipping Size:** 33" x 55" x 50" • (83.82 cm x 139.7 cm x 127 cm)

**Net Weight:** 215 lbs. • (97.52 kg)

**Shipping Weight:** 342 lbs. • (155.13 kg)

**Unoccupied Water Capacity:** 90 gal. • (360 L)

**Occupied Water Capacity:** 55-75 gal. • (208-300 L)

**Drainage Time:** +/- 80 seconds at ideal plumbing conditions (unoccupied)

## Included Features:

1. Acrylic Tub Shell
  - Gloss white finish
  - Fiberglass gelcoat reinforced
2. Stainless steel frame with adjustable leveling Legs.
3. Plastic composite and tempered glass outward swing door with gear and shaft mechanics for 3 door latches.
4. Removable front apron with two access panels.
5. One removable and reversible end panel.
6. Stainless steel chrome finish U-shape deck and wall mount grab bars.
7. Extension panel, filler for 60" alcove installations
8. Two (2) 2 inch PVC drains with 2 end caps included. Each drain has two (2) 2 inch outlets, one overflow and a stainless steel operated opener with extended handle in chrome finish.

## Jetting & Therapy Option

1. Hydro (Multicolor LED Light Included)
2. Air + Hydro (Multicolor LED Light Included)
3. Hydro + MicroBubble Therapy (Multicolor LED Light Included)
4. Air + Hydro + Hydro Independent Foot Massage (Multicolor LED Light Included)
5. Soaking (Multicolor LED Light Not Included)



## Jetting Options

### Hydro Massage

- Hydro Massage Pump 5AMP 600W \*
- Hydro Massage Intensity Dial Control
- In-line Water Heater 5.5AMP 650W \*
- Ozone Sterilization
- 14 jets
- On/Off Push Control

### Hydro + Hydro Foot Massage

- Hydro + Hydro Massage Pumps (2) 5A5MAPM 6P0 600W0W \*
- 2 Hydro Massage Intensity Dial Controls
- Ozone Sterilization
- 16 jets
- On/Off push control
- In-Line Water Heater 5.5AMP 650W \*

### Air Massage

- Air Massage Pump 4.5AMP 486W \*
- 3 Speed Pump
- Auto-purge (Activates 20 minutes after pump shutdown)
- 16 jets
- On/Off push control

### MicroBubble Therapy System

- 1 HP Pump 10AMP\* 1200W
- Pressure Vessel
- On/Off Push Control
- Agitator Valve

**Note:** Multicolor LED light .04AMP\* with On/Off push control is included with the following dual packages: Hydro + Air, Hydro + Micro, Hydro + Hydro

**Disclaimer\*:** AMP value for each pump may change based on availability. Please verify before purchase. (800.480.6850)

## Warranty

- Lifetime limited\* warranty on shell, frame, door, and parts to original purchaser/Address
- Labor or installation is not covered - please refer to the warranty certificate
- Thermostatic control valve faucet is covered for 1 year due to water quality
- Non **TubToday** brand faucets covered under manufacturers original warranty

## Faucet Options

### 2. Two-Piece Fast Fill Faucet

- Up 10 16 GPM @ 60 PSI an ideal in-home plumbing conditions
- Two 5' water supply lines with 3/4" connectors
- Pull out, hand held, chrome plated hand shower with a 5' ft. retractable stainless steel braided hose

### 1. Five-Piece Fast Fill Faucet



- Up 10 18 GPM @ 60 PSI an ideal in-home plumbing conditions
- Two 5' water supply lines with 3/4" connectors
- Pull out, hand held, chrome plated hand shower with a 5' ft. retractable stainless steel braided hose

## Optional Features


1. Heated Seat and Backrest 4AMP 470W
2. Digital Controller

## Electrical Requirements

Dedicated GFCI protected electrical line(s) required

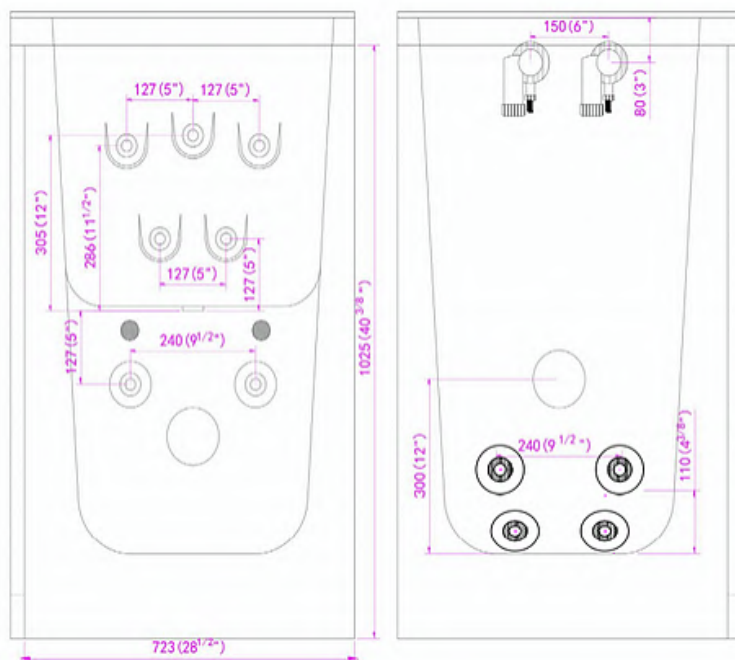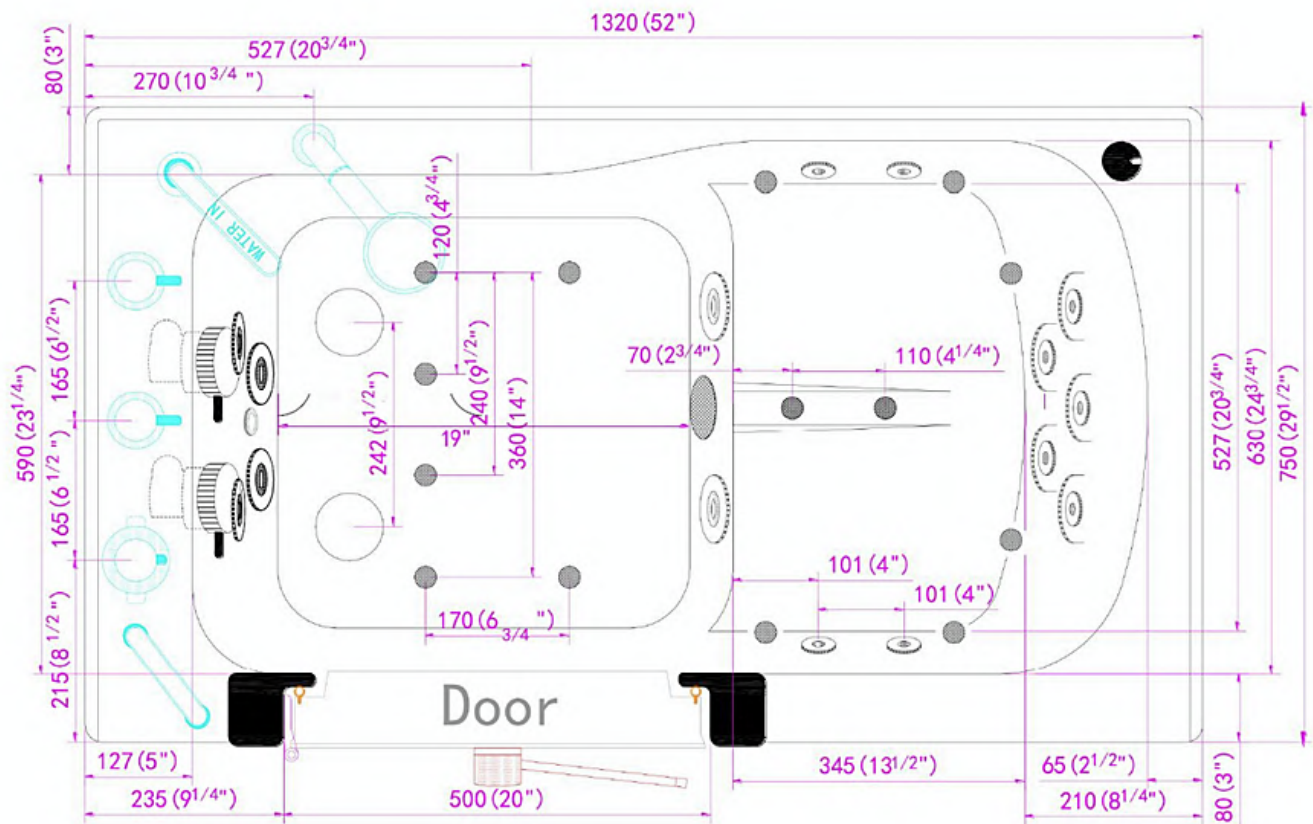

## Dual Drain Technology - Two 2 Inch Independent Floor Drains

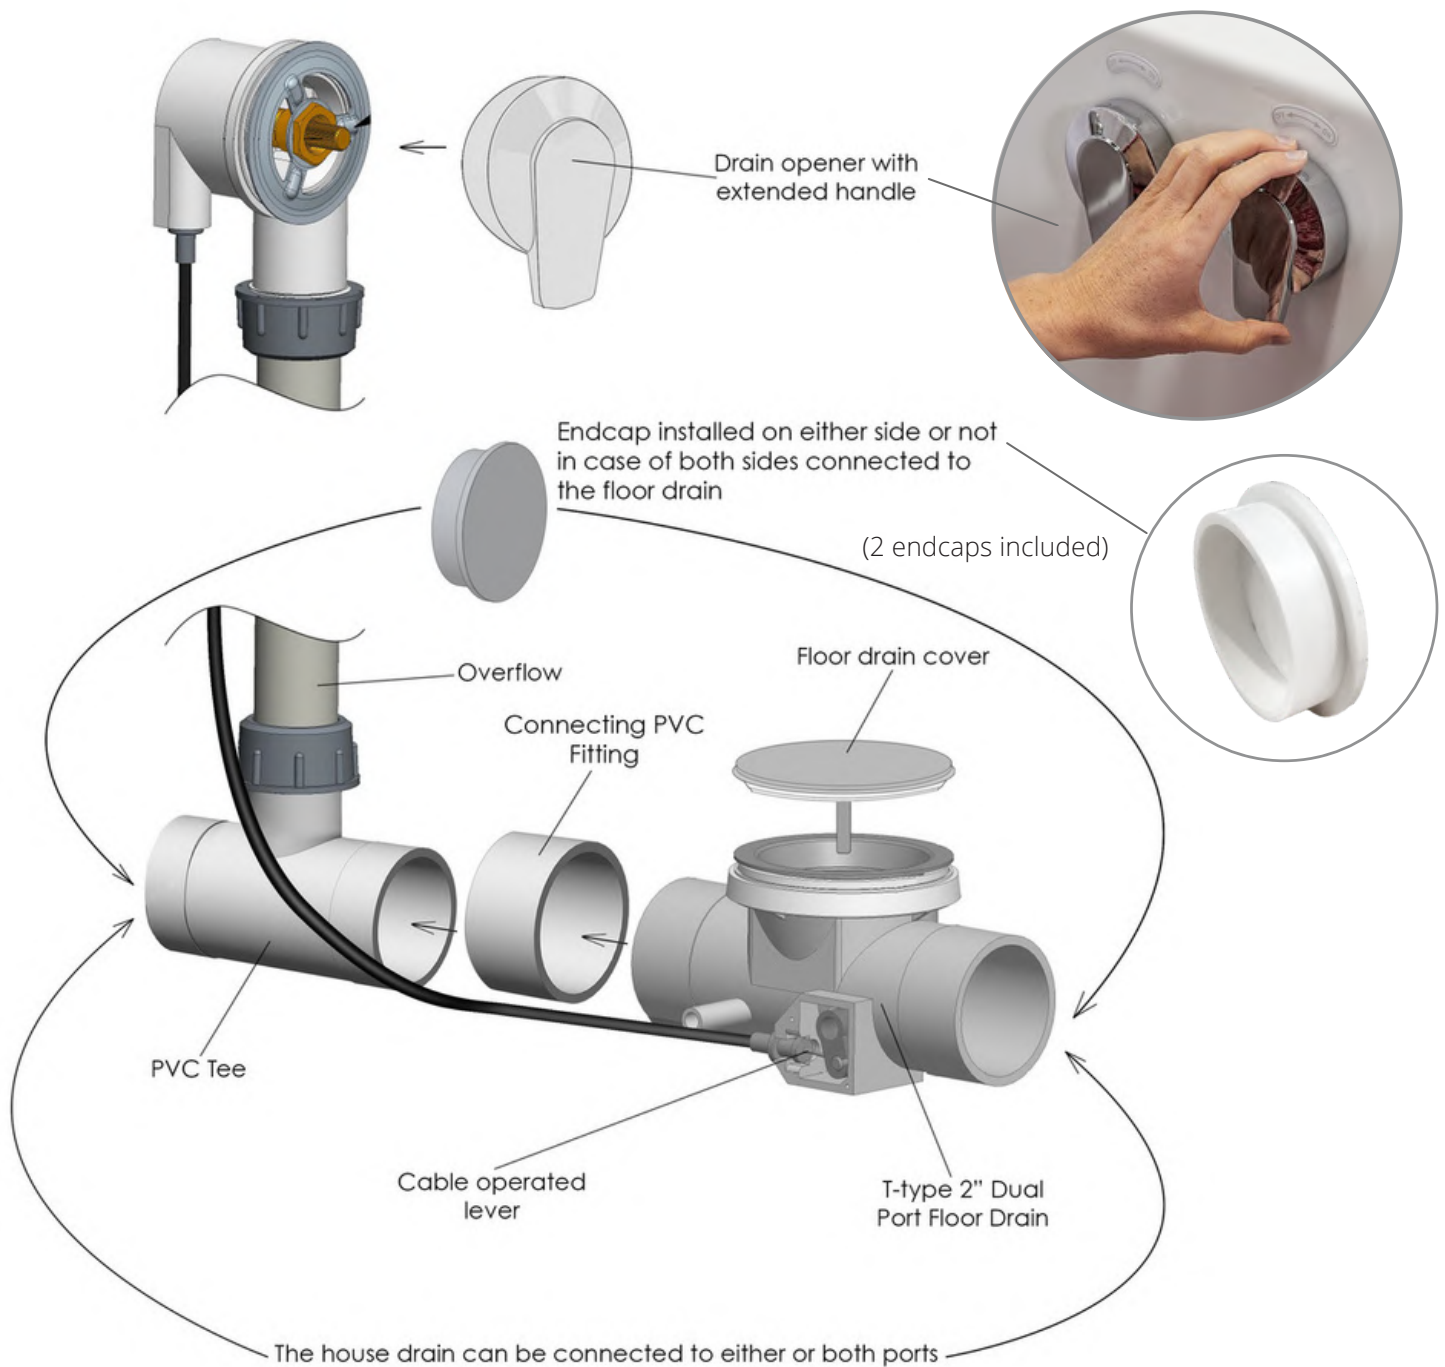




## Two 3/4" connector water supply lines included with Fast Fill Faucets



Connect to Shut  
Off Valves  
(not included)

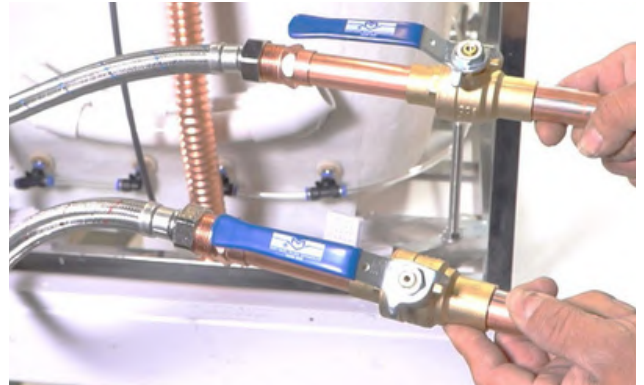

All electrical fixtures  
connect to a dedicated  
GFCI protected outlet.




Drain Cap

Use a drain cap to close  
unused drain port.



T-Type four (4) 2" drain ports  
allow for the drain pipe to be  
installed in either direction.

Images below show examples of PVC pipe  
connections (not included). Reducers can  
be used to connect smaller drain pipes.

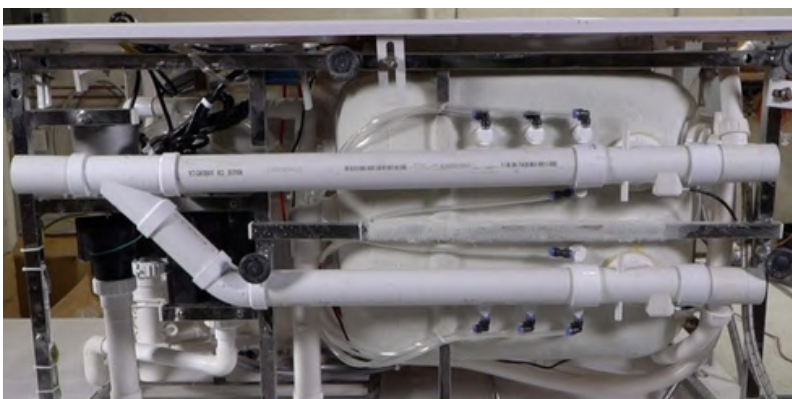

# 5 Piece Single Lever Fast-Fill Faucet

## Description

Solid brass spout in a chrome finish with a 5-setting pull out hand shower mixer including a 5' braided hose. Two 3/4" 5' braided stainless-steel supply lines are included along with Cold/Hot levers with a diverter for the hand mixer.

## Flow


- Hand shower is limited to 1.9 GPM (7.5L/min)
- Faucet fill rate designed for 18 GPM (68.1L/min)

## Cartridge


- 40mm high flow cartridge design
- Nonmetallic/nonferrous and stainless-steel material



## 5 Piece Fast-Fill Faucet Contents

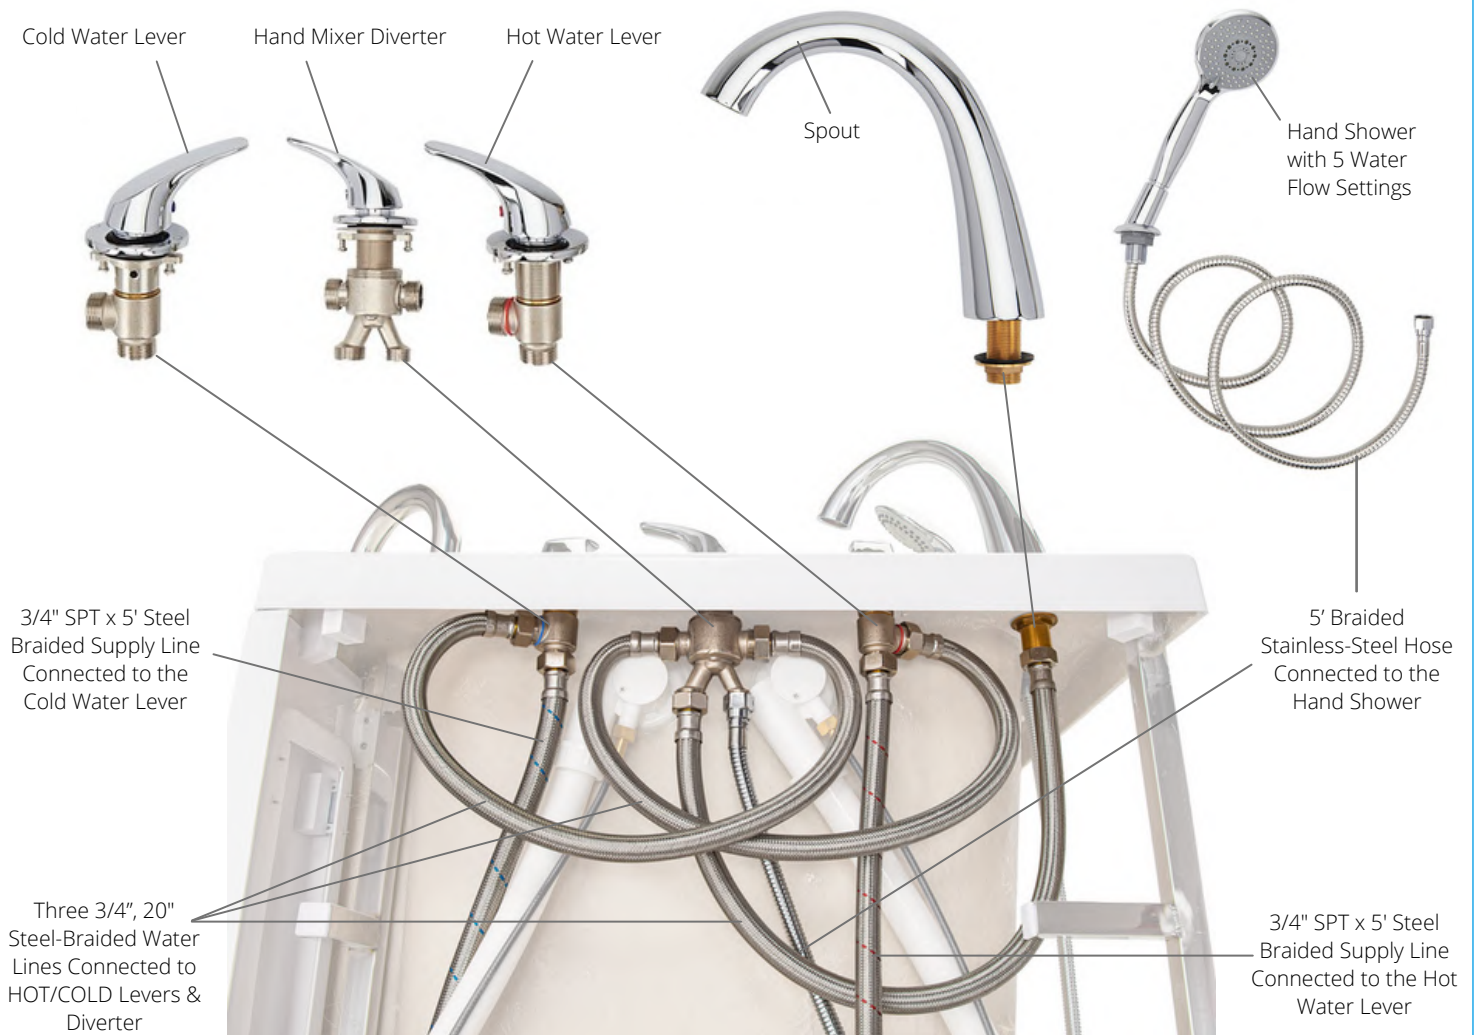


# 5 Piece Single Lever Fast-Fill Faucet

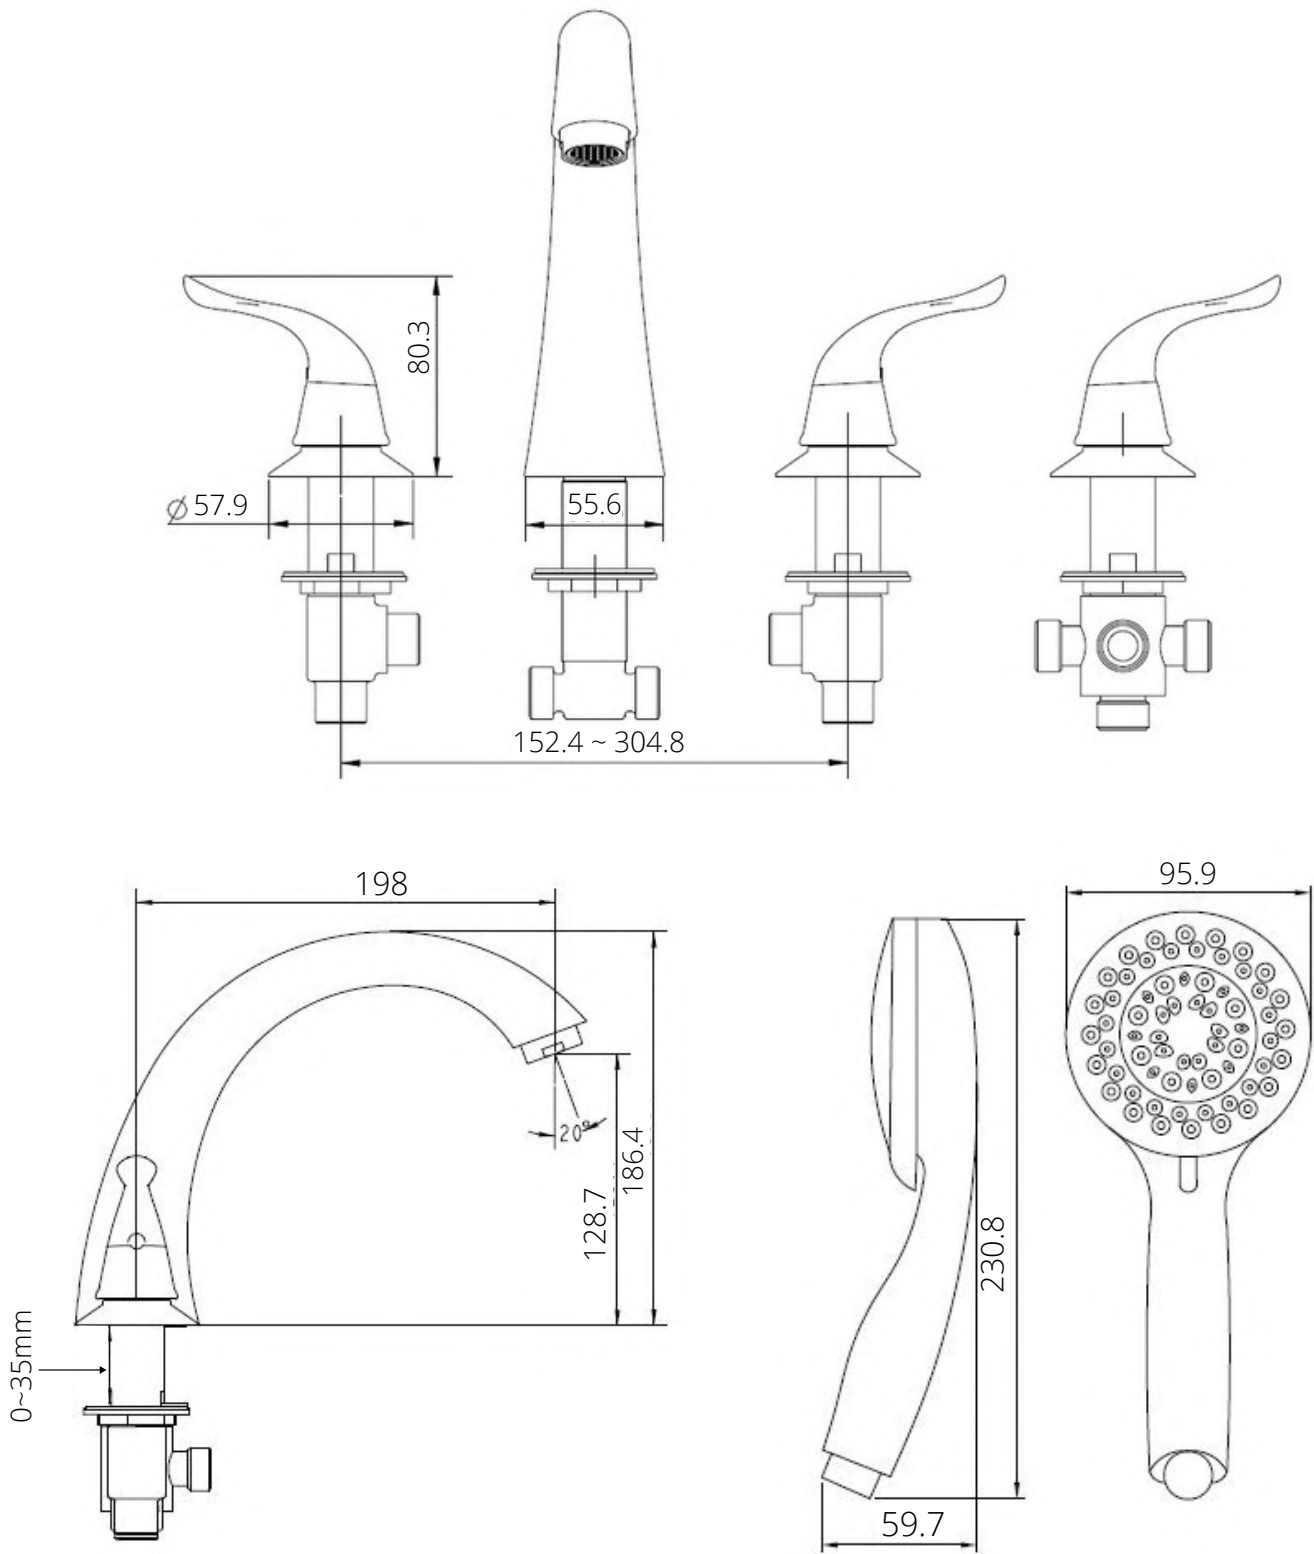


# 5-Piece Fast Fill Faucet Installation Guide

Step-by-step Instructions to install a 5-piece faucet.

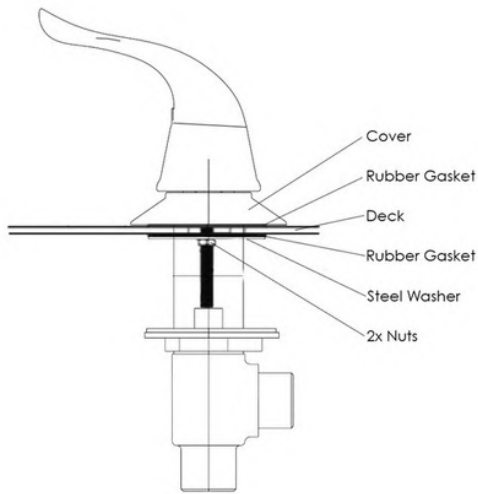


**1.** Unscrew the 2 nuts securing the steel washer and rubber gasket. In this order, remove the steel washer and rubber gasket, place your lever on the deck, replace the rubber gasket and the steel washer. Firmly secure the 2 nuts to hold the fixture in place.

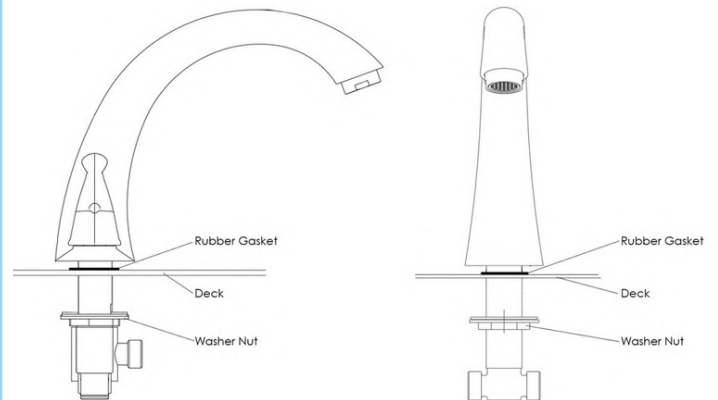

**2.** Unscrew the washer nut and place the rubber gasket and spout above the deck. After, secure the washer nut from underneath the deck.

**3.** Remove the plastic nut and insert your hand mixer and hose into your deck opening. Re-secure the plastic nut underneath the deck to hold the hand mixer and housing firmly in place.

**4.** Connect the supply lines provided with your 2-Piece Fast Fill Faucet to their respective hot and cold connections.

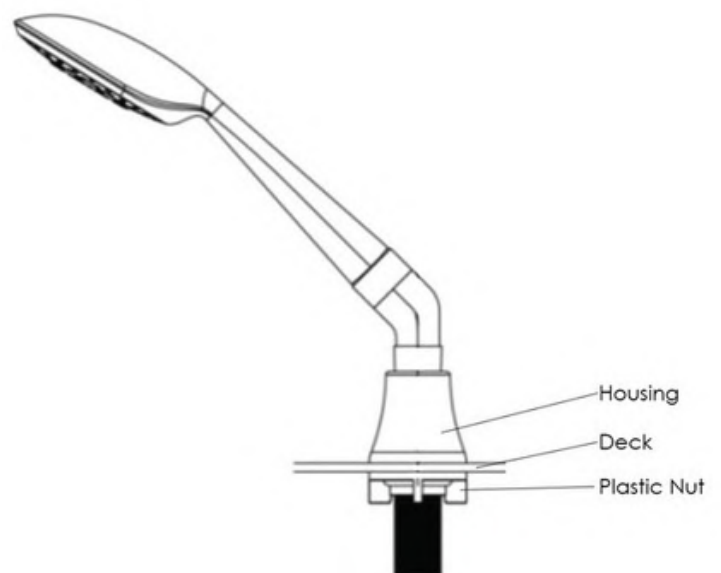



# 2 Piece Single Lever Fast-Fill Faucet

## Description

Solid brass spout chrome finish single lever high flow bathtub faucet with diverter button Two (2) 3/4" 5' braided stainless-steel supply lines Pull out hand shower mixer with 5 settings and 5' braided hose in a Chrome or Brushed Nickel finish.

## Flow

- Hand shower is limited to 1.9 GPM (7.5L/min)
- Faucet fill rate designed for 18 GPM (68.1L/min)

## Cartridge


- 40mm high flow cartridge design
- Nonmetallic/nonferrous and stainless-steel material

## Standards

Certified to meet:

- CSA B-125.1, ASME A112.18.1, ICC 117.1
- ON/OFF Push Diverter
- Certified to ANSI/NSF 61/9 for the Hand Shower
- ADA for lever handle
- IAPMO R&T UPC certified

**NOTE:** This faucet is designed to be installed through: G.W: 7.75 kg/ 17 lbs., 2-1/2" diameter hole for faucet, 1/3" diameter hole for mounting rods, 7/8" diagonal hole for hand shower

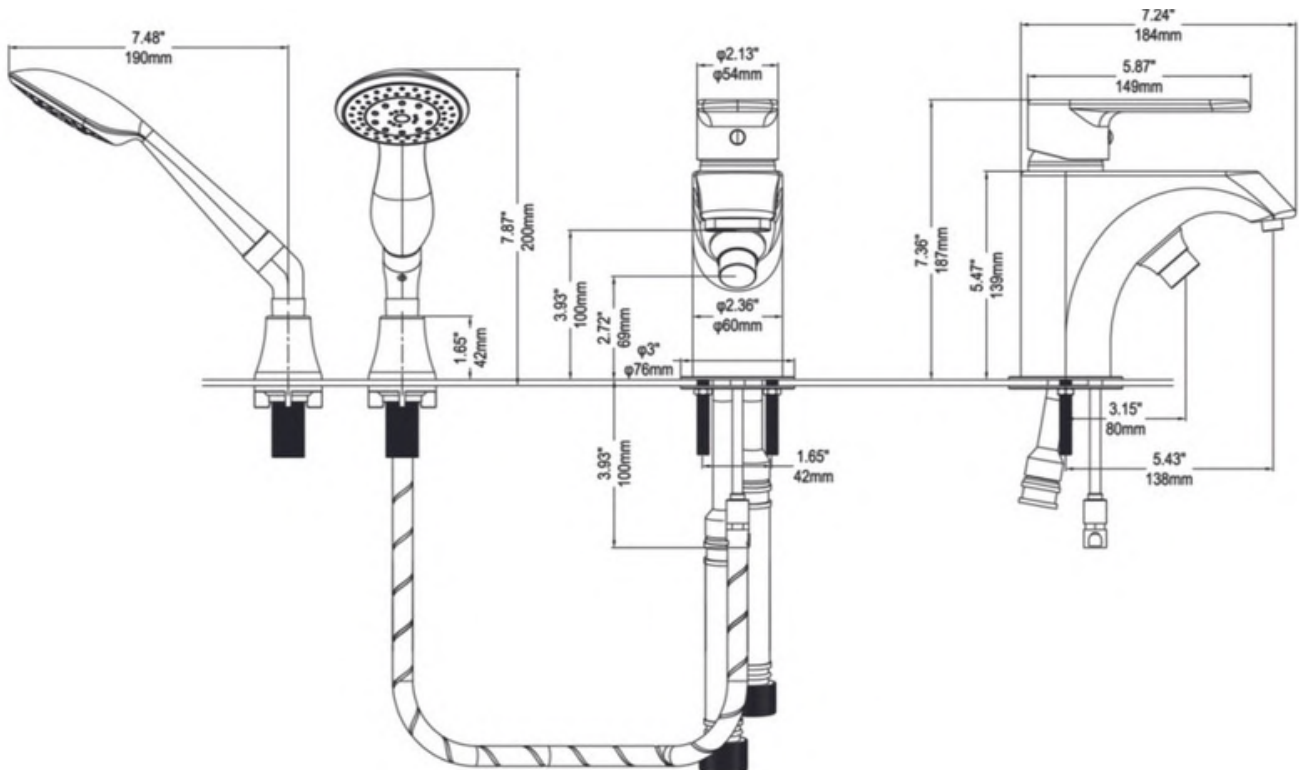



# Replacing A Valve Cartridge

Step-by-step Instructions to replace a valve cartridge for 2-piece faucets.

Step.1 Remove the Hot/Cold screw hole cover.



Step.2 Use an Allen wrench to remove the handle Screw.



Step.3 Take out the handle and remove the brass escutcheon



Step.4 Use a wrench to unscrew the pressure cap.



Step.5 Remove the cartridge and replace it with new piece.

