TUBTODAY

Elite: Acrylic Inward Swinging Door Walk-In Tub Specifications

Elite

Actual Size: 29 x 52 x 38
Seat Width: 21.75 inches
Shipping Size: 32x54x50
Shipping Weight: 275 lbs.
Net Weight: 205 lbs.
Unoccupied Water Capacity: 75 gal.
Occupied Water Capacity: 35-55 gal.
Drainage Time: +/- 80 sec at ideal home plumbing conditions

Included Features

1. Acrylic Tub Shell
   - Gloss white finish
   - Fiberglass gelcoat reinforced
2. Stainless steel frame with adjustable leveling Legs
3. Inward Swing removable brushed stainless steel door with a frosted tempered glass
4. Two front and one end reversible, removable access panel
5. Stainless steel chrome finish U-shape deck & wall mount grab bars
6. Reversible extension panel, filler for 60" alcove installations
7. Removable swivel tray in a white matte finish
8. Two (2) 2" PVC T-type two outlet drains with two (2) endcaps included. Two (2) overflows and stainless steel cable operated openers with extended handles for an easier grip in a chrome finish.

Jetting & Therapy Options

1. Dual Jetting (Air + Hydro) + LED Light
2. Hydro + Hydro Independent Foot Massage
3. Hydro Massage (No LED)
4. Hydro Massage + Microbubble + LED Light
5. Microbubble Therapy (No LED Light Included)
6. Soaking Option Only

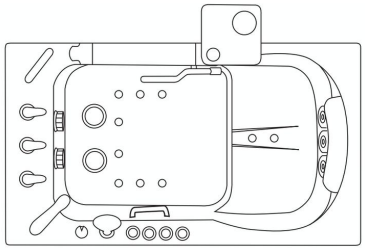

Jetting Options

Hydro Massage

- Hydro Massage Pump 5AMP 600W
- Hydro Massage Intensity Dial Control In-line Water Heater 5.5AMP 650W
- Ozone Sterilization
- 14 jets
- On/Off Push Control

Hydro + Hydro Foot Massage

- Hydro + Hydro Massage Pumps (2) 5AMP 600W
- 2 Hydro Massage Intensity Dial Controls
- Ozone Sterilization
- 16 jets
- On/Off push control
- In-Line Water Heater 5.5AMP 650W

Air Massage

- Air Massage Pump 4.5AMP 486W
- 3 Speed Pump
- Auto-purge (Activates 20 minutes after pump shutdown)
- 16 jets
- On/Off push control

Microbubble Therapy

- Air Pressure Pump 10AMP 1200W
- Pressure Tank
- On/Off push control

Faucet Options

1. Five-Piece Fast Fill Faucet
   - Up 10 18 GPM @ 60 PSI an ideal in-home plumbing conditions
   - Two 5' water supply lines with 3/4" connectors
   - Pull out, hand held, chrome plated hand shower with a 5' ft. retractable stainless steel braided hose

2. Two-Piece Fast Fill Faucet
   - Up 10 16 GPM @ 60 PSI an ideal in-home plumbing conditions
   - Two 5' water supply lines with 3/4" connectors
   - Pull out, hand held, chrome plated hand shower with a 5' ft. retractable stainless steel braided hose

Optional Features

1. Heated Seat and Backrest 4AMP 470W
2. Digital Controller

Electrical Requirements

Dedicated GFCI protected electrical line(s) required

Warranty

- Lifetime limited* warranty on shell, frame, door, and parts to original purchaser/Address
- Labor or installation is not covered - please refer to the warranty certificate
- Thermostatic control valve faucet is covered for 1 year due to water quality
- Non **TubToday** brand faucets covered under manufacturers original warranty

Note: LED light .04AMP with On/Off push control comes included with the following packages: Dual (hydro + air), Hydro + Micro.

Elite - Inward Swing Door Walk In Bathtub Drawing
2" T Type Dual Port Drain

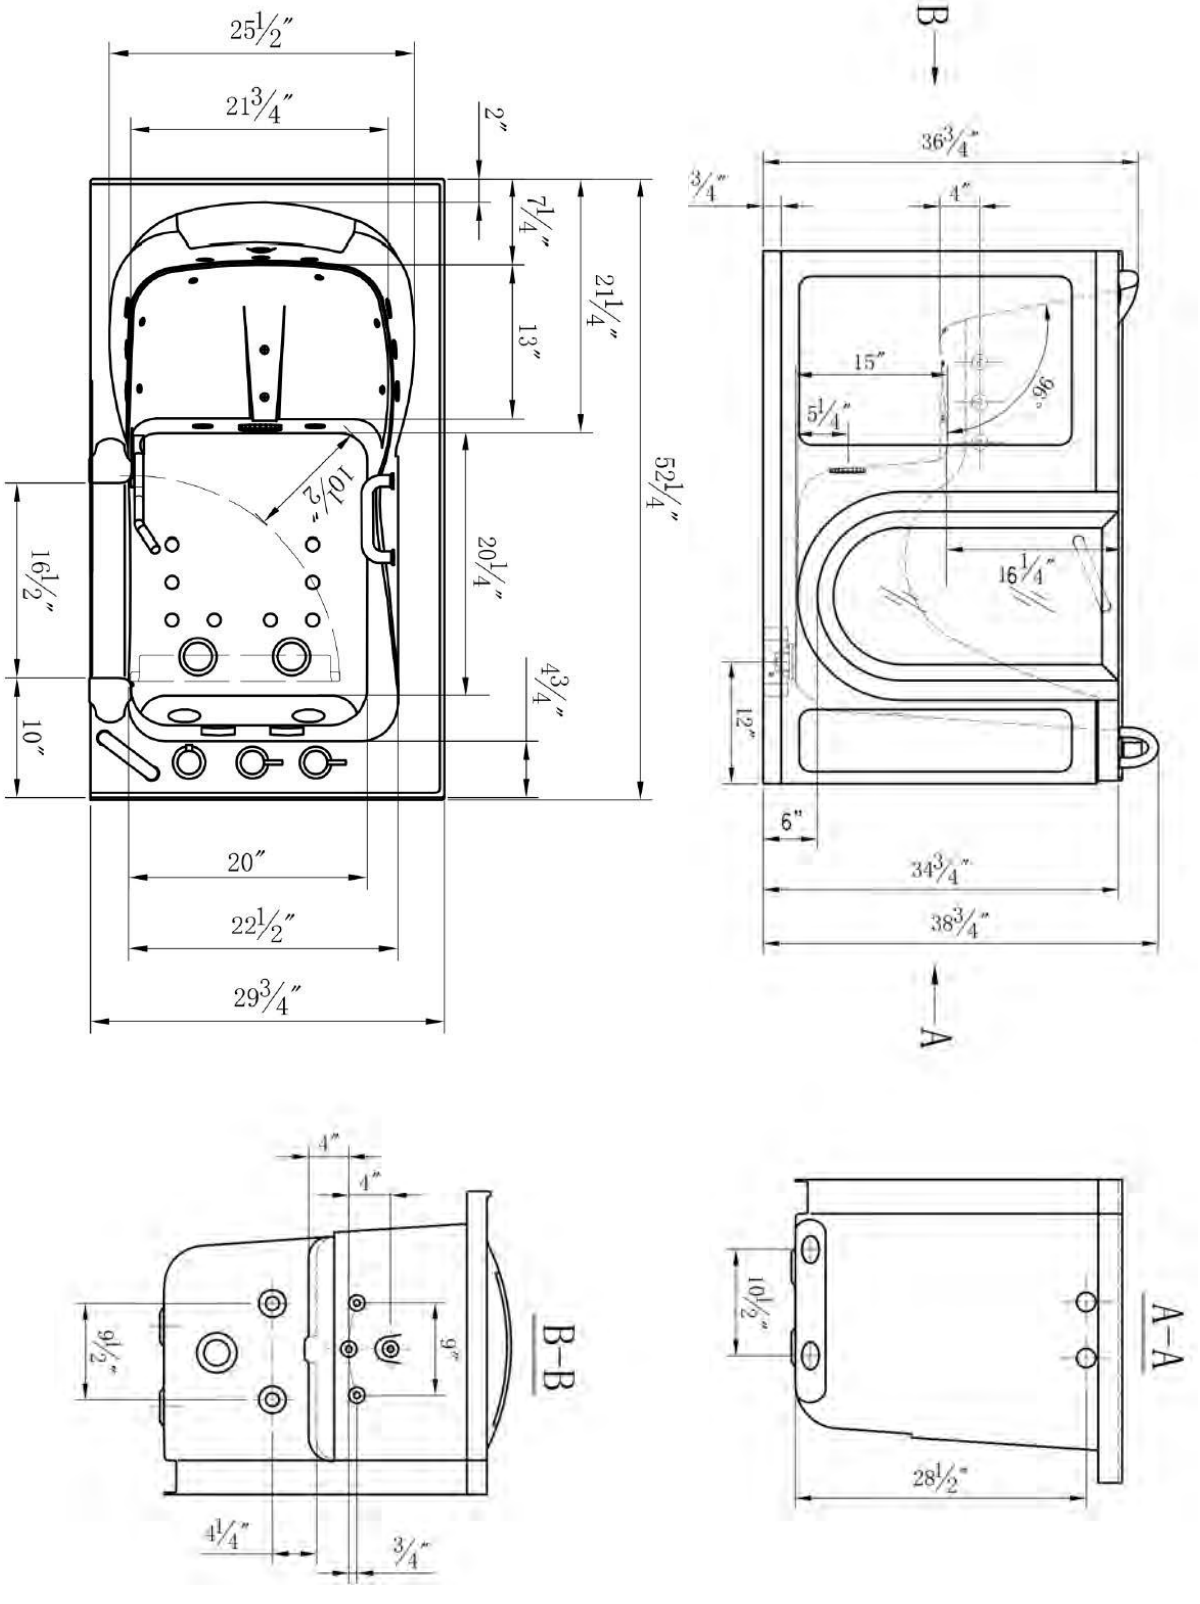

Dual Drain - two (2) independent floor drains

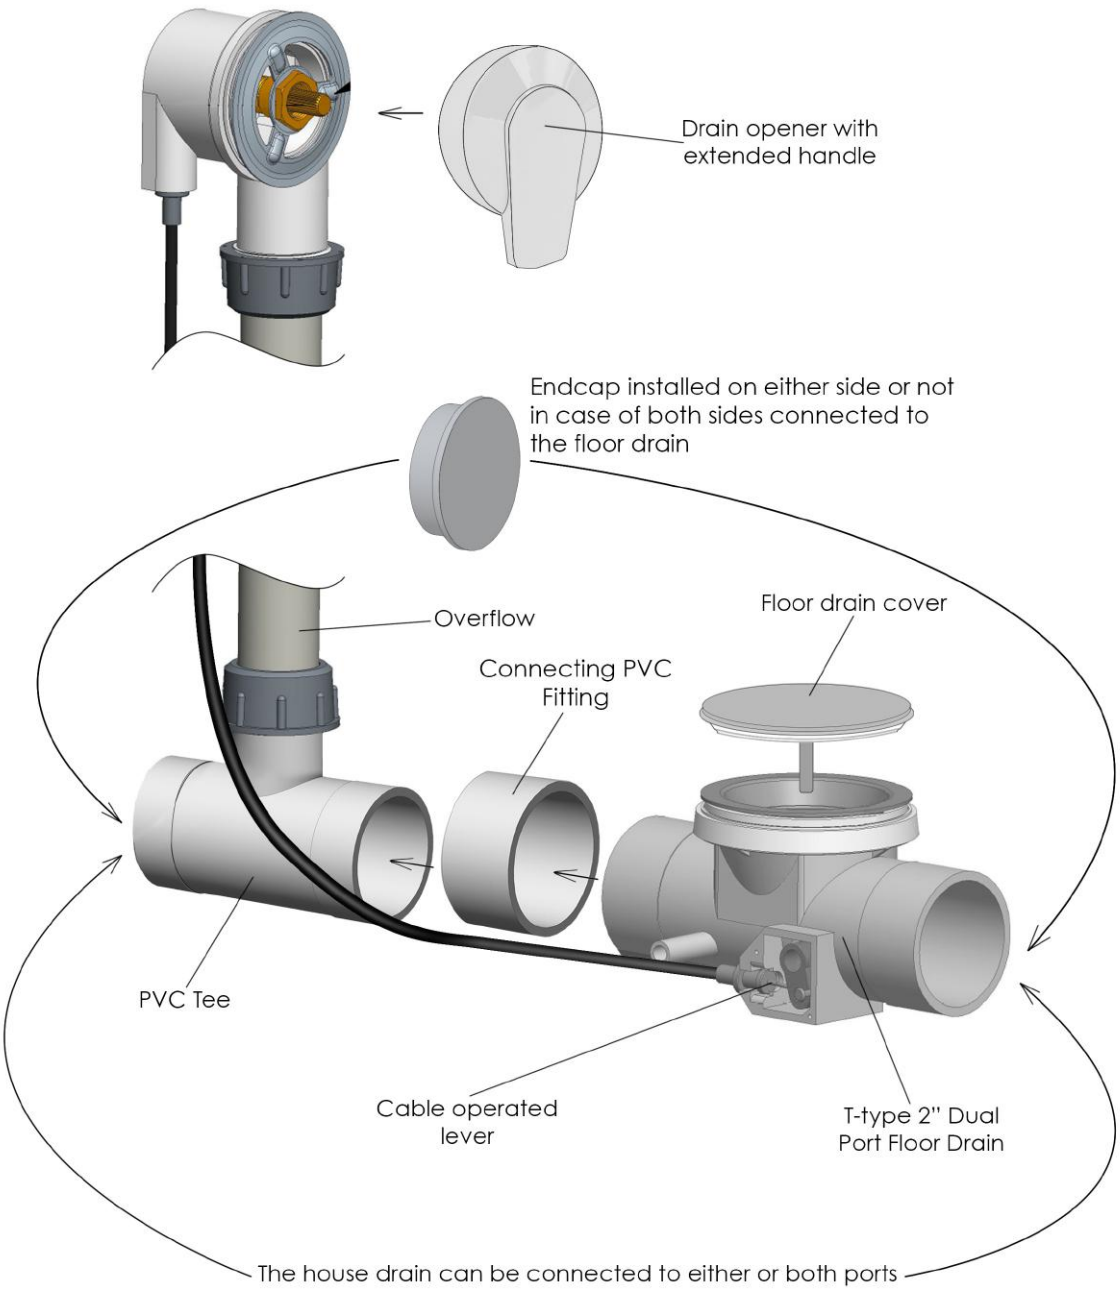

5 Piece 3/4" Fast Fill Faucet with Pull Out Hand Mixer

DESCRIPTION

- Spout - brass chrome finish
- Diverter ¾" – brass chrome finish
- Hot and cold ¾" valve – brass chrome finish
- Two (2) water supply lines with ¾" connectors – 5' long, stainless steel braided
- Handheld shower mixer – PVC chrome finish
- Pull out hand mixer hose – stainless steel braided in chrome finish

Flow

- Faucet - up to 18GPM
- Handheld shower mixer - up to 2GPM

Cartridge

- 40mm and ¾" outlet high flow cartridge design
- Nonmetallic, nonferrous and stainless-steel material

Standards

Certified to meet
ASME A112.18.1-2012/CSA B125.1-12 ICC/
ANSI A117.1-2003

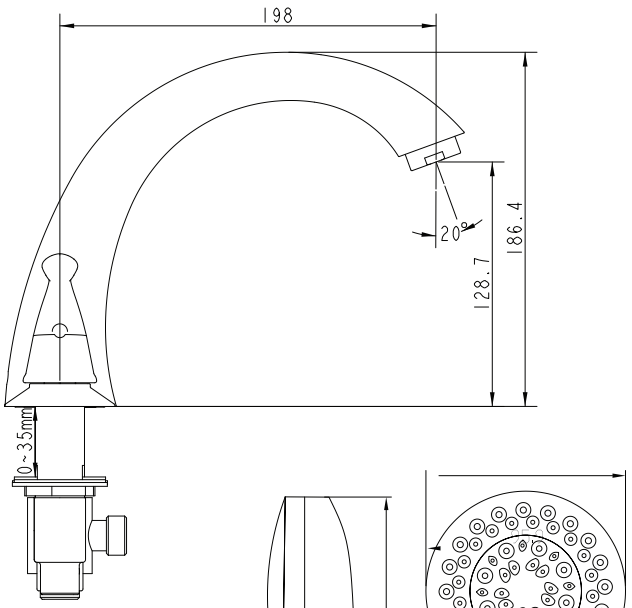

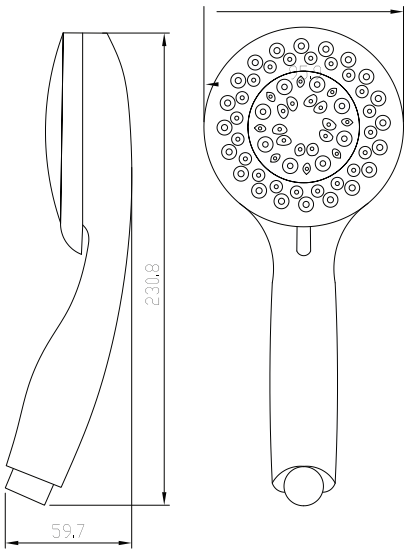

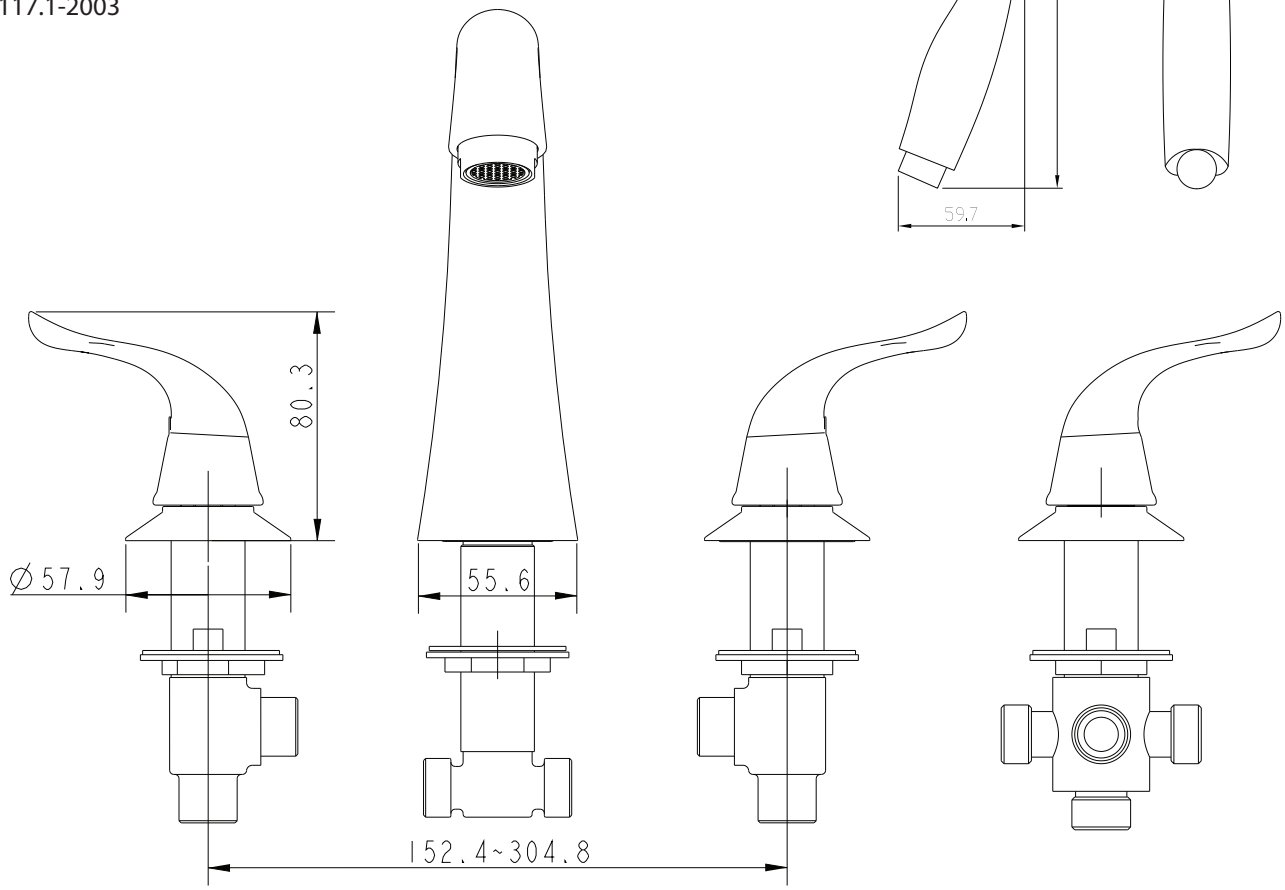

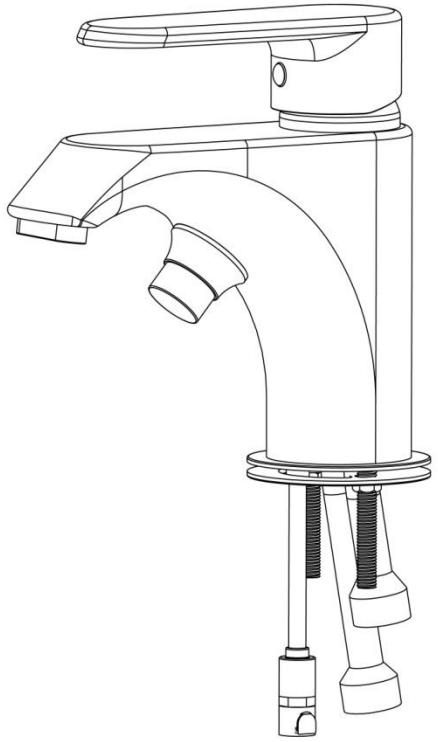

DESCRIPTION

- Spout with diverter – brass chrome finish
- Single lever high flow valve - brass chrome finish
- Includes 5 option adjustable hand shower mixer - PVC chrome finish
- Pull out hand mixer hose stainless steel braided in chrome finish
- Two (2) water supply lines with ¾" IPS connectors, 5' long - stainless steel braided

G.W: 7.75 kg / 17 lbs.

NOTE:THIS FAUCET IS DESIGNED TO BE INSTALLED THRU:

- 2-1/2" DIA.HOLE FOR FAUCET
- 1/3" DIA. HOLE FOR MOUNTING RODS
- 7/8" DIA. HOLE FOR HAND SHOWER

OPERATION

- Pivot action lever style handle
- Temperature controlled through 180°degree arc of handle travel

FLOW

- Faucet – up to 18GPM
- Handheld shower mixer – up to 2GPM

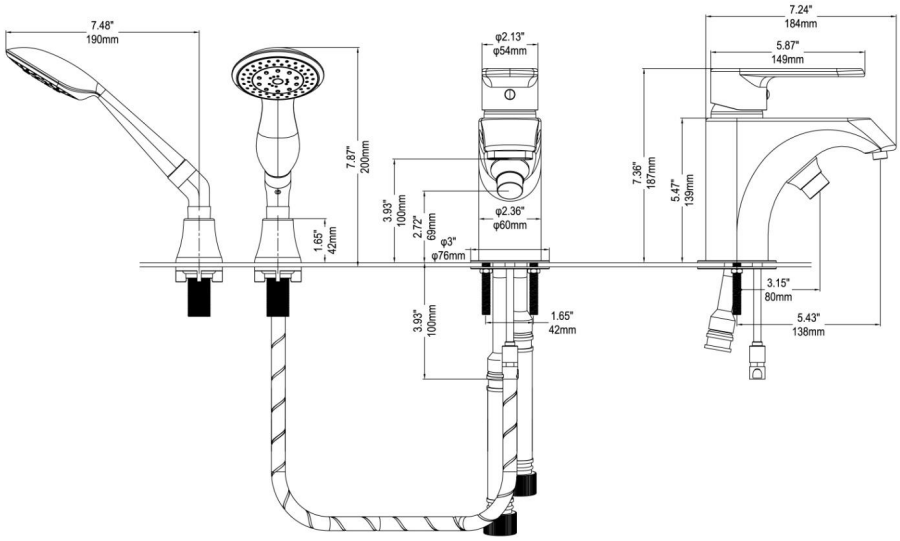

CARTRIDGE

- 40mm high flow cartridge design
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet: CSA B-125.1,ASME A112.18.1,ICC 117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- ADA for lever handle
- IAPMO R&T UPC certified

Two 3/4" connector water supply lines included with Fast Fill Faucets.

Connect to Shut Off Valves (not included)

All electrical fixtures connect to a dedicated GFCI protected outlet.

T-Type four (4) 2" drain ports allow for the drain pipe to be installed in either direction.
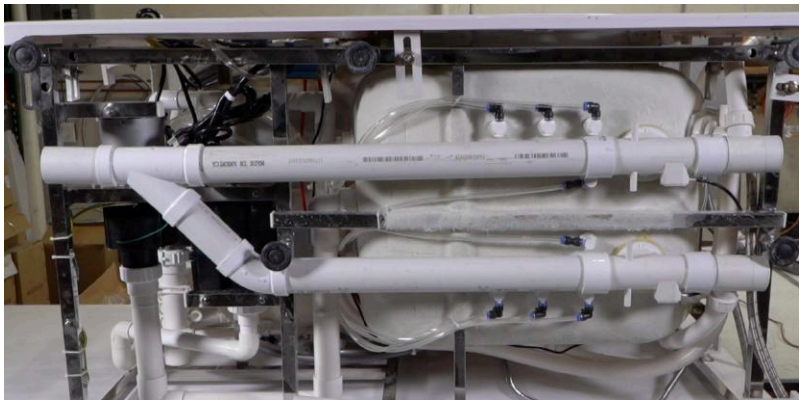
Use drain end caps to close unused drain port (included)